Optical Connector Cleaner **NEOCLEAN™-M** User's Manual

This product is an optical connector cleaner designed for cleaning MPO・MTP™ connector ferrule end face with a simple push action. Please read this user's manual carefully and follow its instructions in using this product

Caution	・This product is intended for cleaning MPO, MTP™connector ferrule end face. It is not for use in cleaning lens type optical ports (transceivers, etc.) or other applications. ・When storing, carefully ensure that the included attachment is in place, after closing its lid, inorder to protect the cleaning cloth. ・Please check the amount of remaining cleaning cloth through the check window before use. ・The guide will not move if the cleaning cloth is used up.	**Prohibited**	・Do not store in direct sunlight, and avoid hot and/or humid environment as the product may become deformed ・Do not disassemble this product. ・Do not touch and/or pull out the cleaning cloth. The quality will deteriorate. ・Do not use when you feel excessive force. ・Do not use for any purpose which has not been described in this manual. Products may be damaged.

1. Parts

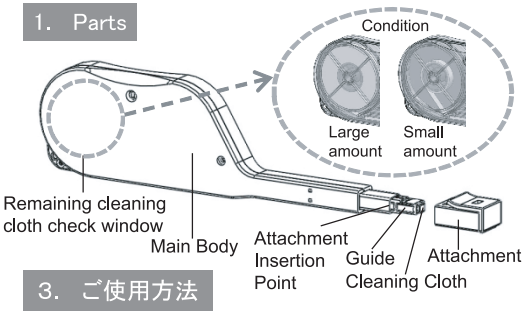

2. Specifications

Name／Model	NEOCLEAN-M ／ ATC-NE-M1
Compatible Connector	MPO Connector MTP™ Connecoter
Compatible End Face	Flat and/or 8 degree, with both guide pins and no pain
# of Usages	600 times

※ "MTP" is a registered trademark of US Conec Ltd.

3. ご使用方法

●Cleaning a Connector in an Adaptor

1. Remove the attacment from the guide.



2. Align the adaptor and the guide key. Insert the guide straight into the adaptor until the cleaning cloth or the insertion mark is completely hidden.

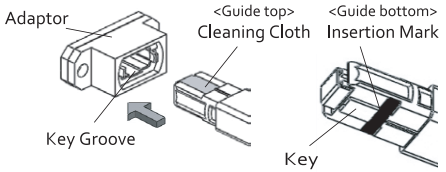

3. Push the main body straight into the Adaptor.
When you hear the click sound, the cleaning is completed.
Sotp pushing and pull straight out.

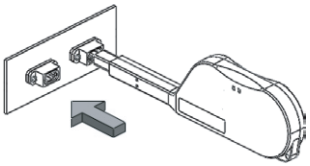

●Cleaning an Optical Connector Plug

1. Open the flap of the attachment.



2. Align the attachment and the optical connector plug. Insert the plug straight into the attachment and push in until the key is completely hidden.

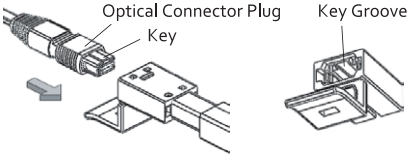

3. Insert the main body straight in to the optical connector plug. When you hear te click sound, the cleaning is completed. Stop pushing and remove straight out.

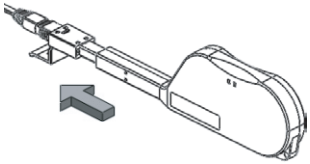

● Inquiries
NTT Advanced Technology Corporation
http://www.ntt-at.com/product/optical_cleaner/

201705